

# KA-3528SURCKT





## **DESCRIPTIONS**

- The Hyper Red source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode
- · Electrostatic discharge and power surge could damage the LEDs
- . It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs
- All devices, equipments and machineries must be electrically grounded

### **FEATURES**

- · Single color
- Suitable for all SMD assembly and solder process
- · Available on tape and reel
- · Ideal for backlighting
- Package: 2000 pcs / reel
- Moisture sensitivity level: 3
- RoHS compliant

### **APPLICATIONS**


- Backlight
- · Status indicator
- · Home and smart appliances
- · Wearable and portable devices
- Healthcare applications


### **ATTENTION**

Observe precautions for handling electrostatic discharge sensitive devices




### **PACKAGE DIMENSIONS**

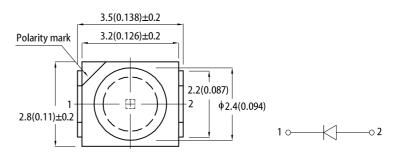

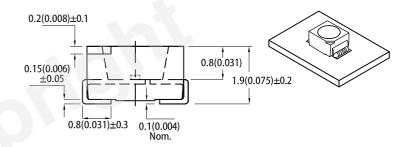

### RECOMMENDED SOLDERING PATTERN

(units: mm; tolerance:  $\pm$  0.1)



- 1. All dimensions are in millimeters (inches)
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.
  3. The specifications, characteristics and technical data described in the datasheet are subject to
- change without prior notice.

  4. The device has a single mounting surface. The device must be mounted according to the specifications.

### **SELECTION GUIDE**

Part Number	Emitting Color (Material)	Lens Type	Iv (mcd) @ 20mA [2]		Viewing Angle [1]	
			Min.	Тур.	201/2	
KA-3528SURCKT	■ Hyper Red (AlGaInP)	Water Clear	150	350	120°	
			*55	*100		

Notes.

1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

2. Luminous intensity / luminous flux: +/-15%.

\* Luminous intensity value is traceable to CIE127-2007 standards.

深圳市大靖科技有限公司

www.sz-diki.com

专营:Kingbright(今台)全系列LED灯珠 原装正品,国内库存,当天发货,技术支持

电话: 0755-23611637/23611737 传真: 0755-23611837

Page 1/4



© 2017 Kingbright. All Rights Reserved. Spec No: DSAI6720 / 1201004210 Rev No: V.12A Date: 08/16/2017



# ELECTRICAL / OPTICAL CHARACTERISTICS at T<sub>A</sub>=25°C

Parameter	Symbol	Emitting Color	Value		Unit
Parameter	Symbol Emitt		Тур.	Max.	
Wavelength at Peak Emission I <sub>F</sub> = 20mA	$\lambda_{peak}$	Hyper Red	645	-	nm
Dominant Wavelength I <sub>F</sub> = 20mA	λ <sub>dom</sub> <sup>[1]</sup>	Hyper Red	630	-	nm
Spectral Bandwidth at 50% $\Phi$ REL MAX I <sub>F</sub> = 20mA	Δλ	Hyper Red	28	-	nm
Capacitance	С	Hyper Red	35	-	pF
Forward Voltage I <sub>F</sub> = 20mA	V <sub>F</sub> <sup>[2]</sup>	Hyper Red	1.95	2.5	V
Reverse Current (V <sub>R</sub> = 5V)	I <sub>R</sub>	Hyper Red	-	10	uA
Temperature Coefficient of $\lambda_{peak}$ $I_F$ = 20mA, -10°C $\leq T \leq 85^{\circ}$ C	$TC_{\lambda peak}$	Hyper Red	0.14	-	nm/°C
Temperature Coefficient of $\lambda_{dom}$ $I_F$ = 20mA, -10°C $\leq T \leq 85^{\circ}C$	TC <sub>Adom</sub>	Hyper Red	0.05	-	nm/°C
Temperature Coefficient of $V_F$ $I_F$ = 20mA, -10°C $\leq$ T $\leq$ 85°C	TC <sub>V</sub>	Hyper Red	-1.9	-	mV/°C

### Notes:

# ABSOLUTE MAXIMUM RATINGS at T<sub>A</sub>=25°C

Parameter	Symbol	Value	Unit
Power Dissipation	$P_D$	75	mW
Reverse Voltage	V <sub>R</sub>	5	V
Junction Temperature	Tj	115	°C
Operating Temperature	T <sub>op</sub>	-40 to +85	°C
Storage Temperature	T <sub>stg</sub>	-40 to +85	°C
DC Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current	I <sub>FM</sub> <sup>[1]</sup>	185	mA
Electrostatic Discharge Threshold (HBM)	-	3000	V
Thermal Resistance (Junction / Ambient)	R <sub>th JA</sub> <sup>[2]</sup>	340	°C/W
Thermal Resistance (Junction / Solder point)	R <sub>th JS</sub> <sup>[2]</sup>	210	°C/W

Notes:
1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2.  $R_{lh,lh}$  Results from mounting on PC board FR4 (pad size  $\geq$  16 mm<sup>2</sup> per pad).
3. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.




The dominant wavelength (λd) above is the setup value of the sorting machine. (Tolerance λd:±1nm.)
 Forward voltage:±0.1V.
 Wavelength value is traceable to CIE127-2007 standards.
 Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.




### **TECHNICAL DATA**


### **RELATIVE INTENSITY vs. WAVELENGTH**





# **SPATIAL DISTRIBUTION**




# **HYPER RED**








Forward Current Derating Curve



### REFLOW SOLDERING PROFILE for LEAD-FREE SMD PROCESS

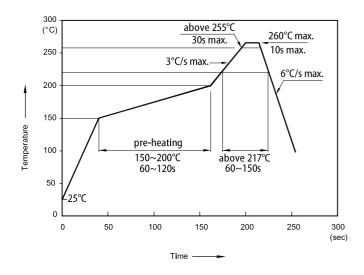

### Notes:


- Notes.

  1. Don't cause stress to the LEDs while it is exposed to high temperature.


  2. The maximum number of reflow soldering passes is 2 times.

  3. Reflow soldering is recommended. Other soldering methods are not recommended as they might cause damage to the product

### TAPE SPECIFICATIONS (units:mm)

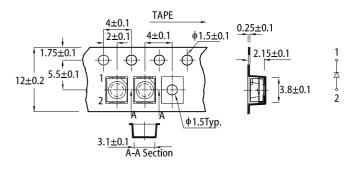



### **REEL DIMENSION** (units: mm)





### **PACKING & LABEL SPECIFICATIONS**

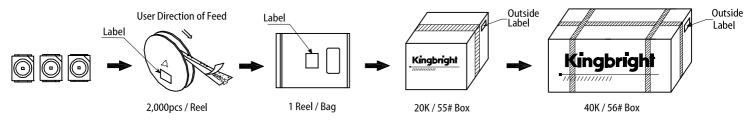



- The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If
- customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.

  The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright. All design applications should refer to Kingbright application notes available at <a href="http://www.kingbright.com/application">http://www.kingbright.com/application</a> note

